

1 Any PA System



A

2

3


4

5



Receivers & Headsets

The system is compatible for use with any of these layouts

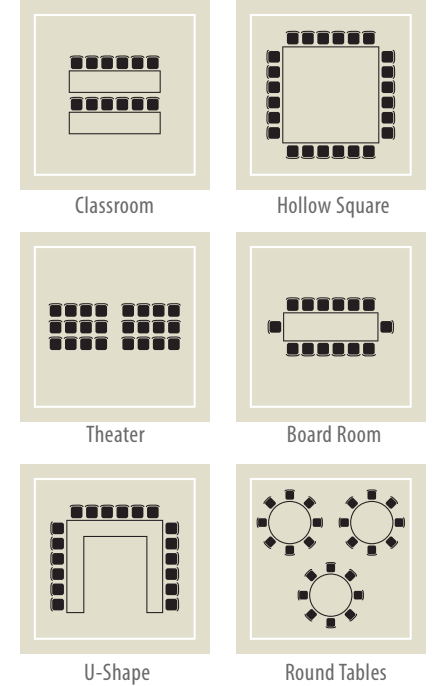


ProT800 Interpretation System is designed to work as follows:

- 1** Line-level output from Sound System connects to and feeds all sound to first IC2 console "Floor In."
- 2** For additional languages each additional IC2 connects via a single CAT5 cable to receive Floor and Relay audio all consoles Interpreter Microphones and Headphones connect to IC2 console.
- 3** Each IC2 "Norm Out" output connects to each Transmitter so that interpreter's voices can be broadcasted wirelessly. Connection cable can be run over 500m to strategically place transmitters
- 4** Receivers use channel selector to so that those in attendance may listen to the language of their preference. This configuration allows for a dedicated channel for each language. You may add up to 5,000 receivers to any system.
- 5** System may be configured for up to eight (8) languages by adding two (2) headset microphones, one IC2 and one (1) transmitter per language.
- A** Floor language may be transmitted by simply adding a transmitter to first IC2 "Relay" output.

Bigger, Better, Lighter

The new standard in tabletop booth design using a patented Snap & Slide® system

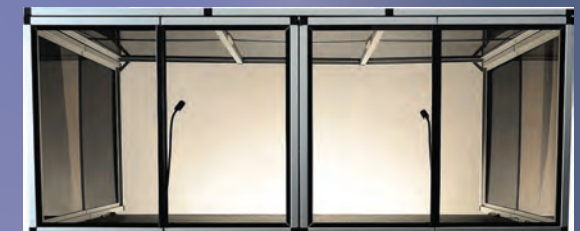

Call Today 1.800.792.5020