

Professional FM Interpretation System

The PRO-T700 is a complete language interpretation system designed for optimum portability and functionality. The system can have two interpreters working per language and is equipped separate volume and tone control, two microphones, and two headphones for the interpreters with microphone soft-button selectors for seamless and quite segues between interpreters and language.

The PRO-T700 offers 40 narrow-band and 20 wide-band channels to choose from. Top audio quality is assured by its superior low noise circuitry and sophisticated audio processors. System covers up to 1,000,000 square feet and capable of broadcasting to over 45,000 people. Combining more than one PRO-T700 system provides the ability to handle multiple languages and utilize the 'AUTO RELAY' interpreting function of the system. Additional IC2 connect via CAT5 Cable.



Price \$4,416.00

PRO-T700 SYSTEM COMPONENTS

Monitoring

- 1-IC-2 Interpreter Console
- 2-PC310 Headphones Microphone

Transmission

- 1-T35 Large Area Transmitter

Receivers

- 10-R37 One Channel Receivers
- 10-HED021 Executive Headsets

Accessories

- 1- 2015 Wheeled Carrying Case w/Retracting Handle
- 2- XLR/XLR Connecting Cables

Interpreter Booths (may be added at additional cost)

- LB12 Tabletop Interpretation Booth
- (70" X 35" X 35" - 70 lbs.)

Multiple Languages

- (1) T35 Transmitter, (1) IC2 Console and (2) PC151's
- Upgrade to R35-8 Eight Channel Receivers
- CAT5 cable and XLR Cables


Quick Specs

Receiver Channels:	One (built-in seek function)
Transmitter Channels:	60 (selectable to any one)
Packed Dimensions:	24" X 14" X 8"
Weight:	33 lbs.
Operating Freq:	72-76 MHz
Range:	0-1,000 feet radius (320m) **

Technical Data

R37 Receiver	Black
Dimensions:	3.5" X 4" X 0.6" - Wt. 3.5 oz.
Operating Freq:	72-76 MHz (0.025 Hz)
Earphone:	1/8" Mono Jack
Controls:	Volume, Channel Seek
Power Source:	2xAA 1.5V Battery
Battery Life:	30-60 hours (Alkaline)
T35 Transmitter	Black
Transmitter Channels:	60 (selectable to any one)
Range:	0-1,000 feet radius (320m)**
Audio Output:	Line Level RCA & 1/4" Headphone
Audio Input:	Mic/Line Level (XLR or 1/4")
Power Source:	120VAC Adapter (220V available)
IC2 Interpreter Console	Black
Dimensions:	3.5" X 3.5" X 2.5" Wt. 0.5 lbs.
Controls:	Independent Volume Controls (2), Mute/Cough, Relay, Key, Norm
Audio Input/Output:	Mic (1/4" & 1/8"), Line Level (XLR)
Connections:	XLR Line In, 1/4" & 1/8" Mic In
	Headphone Jacks (x2) 1/8"
Power Source:	120VAC Adapter (220V available)

PRO-T700 - 4 Steps to Quality Interpretation (PMTR)

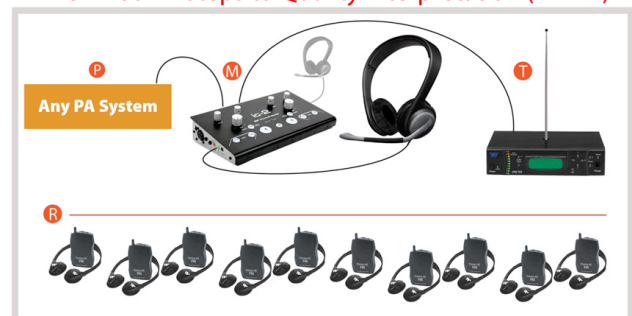

P- Presentation, M- Monitoring, T- Transmission, R- Reception